



Saas Instruments
Henry Fordin katu 5 B
FI-00150 HELSINKI
Tel. +358 9 6860 610
Fax +358 9 6860 6130
www.saas.fi

Highline sauna plastic fiber

Installing the projector

The projector is mounted under the benches to a maximum height of one metre above the floor.

1. Attach the projector to the wall with two screws. There are places for the screws on the sides of the projector.
2. The projector is to be securely connected to the the electricity grid. Connections should be made only by a competent electrician.
3. The common end of the fibre bundle is installed to the projector by pressing while turning the end into the hole in the projector.




Installing the fibres

Check the adequacy of fibers for the desired locations (behind the backboard, on the bench) and determine the location of the points. The fibers can be installed as surface-mounted, leaving them visible or covered with a wooden board. The fibers can also be mounted behind the panel.

Drill holes of 3.0 mm for the fibers, insert the fiber through the hole and, if necessary, ensure the retention of the fibre with (epoxy) adhesive. Excess fiber can be cut, if necessary.

The diameter of the fiber is 2.7/1.5mm with a minimum bending radius of 12 mm

The fibers cannot be installed in the sauna ceiling.

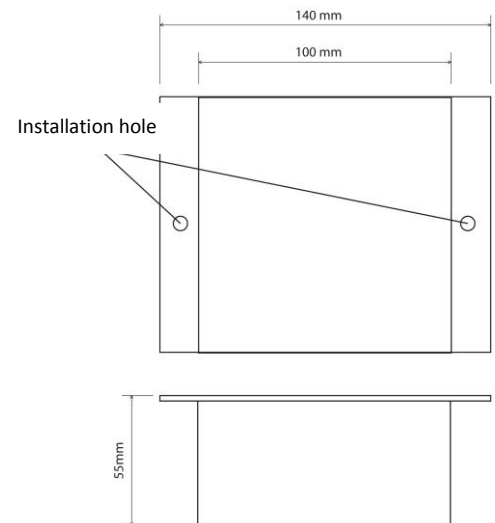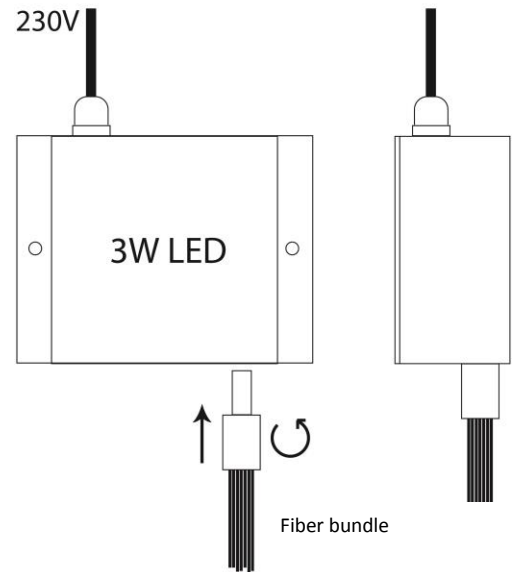

Installation of the projector and the fibres